



(11) Publication number : **0 411 232 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication of patent specification :
27.12.95 Bulletin 95/52

(51) Int. Cl.⁸ : **H04N 1/411**

(21) Application number : 89810766.9

(22) Date of filing : 10.10.89

(54) **Method for high-quality compression by binary text images**

(30) Priority : 04.08.89 IL 91221

(43) Date of publication of application :
06.02.91 Bulletin 91/06

(45) Publication of the grant of the patent :
27.12.95 Bulletin 95/52

(84) Designated Contracting States :
CH DE ES FR GB IT LI NL SE

(56) References cited :
EP-A- 0 194 689
US-A- 3 700 797
US-A- 4 229 768
US-A- 4 290 084
ICL TECHNICAL JOURNAL, vol. 5, no. 1, May
1986, OXFORD, GREAT BRITAIN pages 123 -
146; M.J.J. HOLT ET AL.: 'Recent develop-
ments in image data compression for digital
facsimile'

(56) References cited :
8TH INTERNATIONAL CONFERENCE ON PAT-
TERN RECOGNITION. PROCEEDINGS . IEEE
NEW YORK, NY, US vol. 1, 31 October 1986,
PARIS, FRANCE pages 916 - 918; M. K. KUN-
DU: 'Pixel modification using image topologi-
cal properties for better data compression'

(73) Proprietor : International Business Machines
Corporation
Old Orchard Road
Armonk, N.Y. 10504 (US)

(72) Inventor : Chevion, Dan Shmuel, Dr.
43 Hantke Street
Haifa 34608 (IL)
Inventor : Karnin, Ehud Dov, Dr.
3/25 Alon Street
Kiryat Motzkin 26418 (IL)
Inventor : Walach, Eugeniusz, Dr.
1 Ciegel Street
Kiryat Motzkin 26418 (IL)

(74) Representative : Mirza, Akram Karim et al
IBM Research Laboratory
Intellectual Property Department
Säumerstrasse 4
CH-8803 Rüschlikon (CH)

EP 0 411 232 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention relates to a method for compressing binary image information, in particular in cases where the image comprises text, i.e. only black or white areas. This invention is, therefore, applicable in the electronic processing of information presented on printed or handwritten documents, where the storage of the information while the various processing steps are being performed, the storage for future reference or retrieval and the transmission over data links present space and/or time problems.

The handling of paper documents is a daily routine in today's office environments. Considerations having to do with the care for the natural resources required for manufacturing the paper used for the documents, the speed of preparing and handling the documents to make them serve their purpose, and their storage and possible later retrieval, have resulted in efforts to reduce the number of documents circulated and to leave the working with the documents to automatic record handling devices. The physical handling of the documents is one important aspect in this connection, the other, possibly more important aspect is the treatment of the information contained in the documents.

The treatment of the information contained in documents generally involves the acquisition of the information by some reading device, the transformation of the acquired information into a machine-readable code, the storing of the coded information for later, and possibly repeated processing, the actual processing of the information, and finally the output of the results of the processing, or simply of the unprocessed original information. This output may take visual form, as on a display unit, or in print, or be purely electronic.

The acquisition of the information by a reading device, such as an optical scanner, should be performed with a reasonably high resolution lest the information content should become mutilated or partially lost. Accordingly, the reading device will produce a high volume of scan data which in turn require a large memory capacity for storage. As a typical example, a page of the A4 size (297 x 210 mm), scanned at 100 pels/cm (where "pel" stands for picture element and is either a white or black dot), requires about 700 kBytes of storage space. Even a rather modest number of documents, say a couple of thousands, would call for an unreasonably big memory.

To alleviate this problem, known document scanning systems are provided with data compression routines which save about one order of magnitude so that the compressed data of a scanned A4 page can be accommodated on 25 to 75 kBytes of storage space, depending, of course, on the content of the scanned page. Very clever algorithms, based on arithmetic coding, can achieve a further reduction of about 16%. See, for example, R. Arps, T. Friedman, G. Langdon and T. Truong, "Adaptive Binary Image Compression: Chip Status and Applications", Image ITL, May 1986.

It goes without saying that any compression system must permit later decompression of the information, be it for processing or output. Whether the compressing or decompressing can be done with a certain loss of information, or degradation of quality, depends on the purpose for which the output is needed, and on the amount of redundancy contained in the original image.

In a number of applications where very large volumes of documents must be handled, such as, e.g., in connection with a census, it is essential to increase the compression ratio to its limits, at least by another order of magnitude.

One possible approach to this problem is described in "Combined Symbol Matching Facsimile Data Compression System" by W.K. Pratt, P.J. Capitant, W. Chen, E.R. Hamilton and R.H. Wallis, in Proc. IEEE, Vol. 68, No.7, July 1980.

There it was proposed to feed binary images into a character matching process. Recognized characters will be represented very efficiently by means of their alphanumeric form. Then the remaining residue information will be compressed separately as a conventional binary image. This amounts to an about two-fold increase in compression ratio, although the efficiency of this scheme largely depends on the percentage of recognized characters and on the degree of digitization noise.

An improved technique is disclosed in US-A-4,499,499 Brickman et al., where instead of single character recognition the matching of large symbols, such as individual words in the text, is considered. This technique requires, however, the storing of an addressable library of facsimile symbols, or words, and it does not work for words not found in that library.

In the ICL Technical Journal 5 of May 1986, No. 1, Oxford(UK), pp. 123-146 an overview covering several coding and data compression methods is given. It is proposed to classify and segment a document into regions containing exclusively either text or graphics. It is further proposed to compress these segments according to different compression methods. However, no criteria are mentioned which allow to determine the degree of compressibility of a segment.

From the patent US-A-4,229,769 to Kurahayashi, a process is known in which the scanned image of a document is selectively thinned and thereby compressed. The patent also discloses a process to eliminate iso-

lated dots prior to the thinning step.

It is an object of the present invention to propose a method for the compression of image data with a compression ratio considerably larger than offered by conventional compression methods. The inventive method is based on the cognition that this cannot be achieved if one was to insist on lossless compression, i.e. compression that would permit an exact reconstruction of the original information. Actually, in the majority of practical applications involving text images, lossless compression is not essential. It suffices to have a legible text which subjectively is indistinguishable from the original.

A trivial approach to this would be to reduce the resolution of the scanning. Indeed, many conventional scanners and facsimile devices do allow this option. However, while this approach might be acceptable for some types of image, such as large handwritten text, it would mean unacceptable distortion for other types, like those containing small print. Even for medium-sized text, simple reduction of resolution would cause image quality deterioration which might be annoying to the user.

In contrast, the present invention pretends to solve this problem through a method featuring an overall high compression ratio by means of "lossy" encoding where this is tolerable, and by means of "lossless" encoding where this is essential in maintaining the reproduction quality. This proposal, accordingly, involves the use of variable compression ratios which depend on an evaluation of the nature of the binary image at hand, with lossy compression being limited to large low-frequency areas (where quality deterioration is subjectively unnoticeable, and with small high-frequency areas being compressed losslessly.

The method of the invention still even go one step further: Even in areas where lossy compression is found feasible, it will not be applied indiscriminately. Instead, the compression ratio to be used will in each particular case be adapted to the preservation of the continuity and smoothness of the lines in order to guarantee an overall excellent image quality.

The method of the invention is claimed in claim 1.

Details of the invention will now be described by way of example with reference to the drawing in which:

Fig. 1 is an original, completed form with a colored background;

Fig. 2 is the form of Fig. 1 after filtering;

Fig. 3 is a flow chart showing the determination of the compressibility;

Fig. 4 is a reconstruction of a conventionally compressed handwritten text;

Fig. 5 is a reconstruction of the text of Fig. 4 compressed in accordance with the invention.

The method in accordance with the invention essentially comprises the following five discrete steps: Prefiltering, Evaluation of Compressibility, Connectivity-oriented Subsampling, Lossless Compression and Decompression, and Reconstruction. Each of these steps will hereinafter be reviewed in detail.

1. Prefiltering

Prior to the actual evaluation for compressibility, the scanning data must be "cleaned" by removing all small superfluous black patches which might result either from the scanning noise or from a non-uniformity of the document background. There is a wide variety of filters available which may be used. Reference is made to T. Kimoto and R.G. Casey, "Edge Smoothing Algorithms for Horizontal and Vertical Line Patterns in Binary Images", IBM Research Report RJ 4156, November 1984, and F.M. Wahl, "A Binary Image Processor for Document Quality Improvement and Data Reduction" IBM Research Report RZ 1438, December 1985.

The optimum choice of the filter depends on the character of the specific application and on the availability of the computational power. One preferred filter which is both, fast and effective for a great variety of practical applications, operates on the principle of removing from the binary image all of the black pixels ("pixel" stands for 'picture element'), except for those which either belong to a large black segment or which are adjacent to such segment. A large segment in this context is defined as a run of three black pixels in a row, either horizontal or vertical. If the following information pattern (Array 1)

```

.....
50  ...111111111111.....1....
     ....1.....11.....11.....1.....1....
     .....111.....1.....1.....1....
     .....1.111.....1....
55  .....
```

is passed through such a filter, the result will be as follows (Array 2):

5

10

15

20

25

30

35

40

45

a. The Pixel-Based Approach

50

55

uninterrupted length w .

A check is then made as to whether the length w exceeds the threshold w_t . In one embodiment of the invention, a threshold value of $w_t = 12$ was found to be appropriate. If that threshold is exceeded, new run is addressed. If not, the value of n is incremented by 1, the value of m is increased by w . This process continues until the end of the segment is encountered. If n is still smaller than the threshold n_t , lossy compression is performed on that segment. If n is larger than n_t , lossy compression is performed only if

$$\frac{m}{n} > \left(\frac{m}{n}\right)_t,$$

which may be set to 4, for example.

It is to be noted that the choice of the design parameters, such as the threshold values referred to above, is a matter of experimentation. The values given herein were determined empirically, but they are not meant to be limiting in any way. The values may be varied as necessary in order to increase or decrease the share of the compressed areas, and to, thus, choose the trade off between image quality and desired degree of compression.

b. The Byte-Based Approach

While the pixel-based approach outlined under 1) above performs quite well, it might under certain circumstances turn out to be computationally cumbersome. This can be improved by packing, or re-packing, the pixels into a larger "containment". Indeed, in the majority of practical applications, image data are packed in the byte mode, where one byte represents eight consecutive pixels. Hence, considerable time will be required for the translation of the data to the "normal" raster mode in order to compute the length of all the black and white intervals. In this context, "normal" means that a single number is assigned to each pixel. Thus, if one has to perform arithmetic operations on pixel values, one has to first translate each byte into the corresponding 8-pixel values. This could, e.g. be done by using a look-up table with 256 entries, one for each possible byte value, and eight output ports, one for each pixel.

The preferred procedure comprises the following four steps:

- 1) The number m of non-zero bytes is first computed.
- 2) Each byte is translated into a binary number. This binary number equals 1 if the given byte contains a small black or white run, and it equals 0 in all other cases. A byte is determined to actually contain such a small black or white run if it does not equal either 00000000 or 11111111, when, at the same time, the first pixel of the byte equals the last one.
- 3) The number n of pairs of consecutive "1"-s is computed.
- 4) Lossy compression is initiated if n is smaller than a certain predetermined threshold (which may be 3, for example), or if n is smaller than a given fraction of m (say less than 5%). The mentioned threshold and fraction depend on the specific application and should be determined experimentally.

While the horizontal and vertical distances are generally of the same order of magnitude, it might be advantageous in certain cases to apply the test mentioned before to the transposed version of the original image: Then vertical distances will be considered. Moreover, it might be useful to develop the compressibility criterion from a combination of the regular and transposed versions of the original image, although the experiments carried out suggest that in most practical cases the consideration of the horizontal distances, as described above, is sufficient.

It should be further noted that it might be useful to apply the test to two consecutive lines simultaneously, where the length of the short run would be defined as the larger of two consecutive intervals. As a result, the impact of one-pixel wide noise will be mitigated. This refers in particular to cases where a pixel is located at a line edge. Then either a 1 or 0 value can be obtained. Hence, at the edges of straight lines one can see a one-pixel layer of scanning noise. This is, of course, not the only possible noise effect, but it very important from the point of view of the compressibility test.

Consider, for example, the following long horizontal line (Array 3):

00000000000000000000000000000000
 00000000000000000000000000000000
 00110000011111000001111000001010101
 11111111111111111111111111111111
 11111111111111111111111111111111
 0100001100010101010100001111111100
 00000000000000000000000000000000

Obviously, it can be subjected to a lossy compression without any discernible image quality degradation, however, on the edge (third and sixth lines from the top) a lot of short black and white sequences might cause the decision that this area is incompressible.

3. Connectivity-Oriented Subsampling

In the connectivity-oriented subsampling of the original image, the aim is to reduce the resolution by some factor in both horizontal and vertical directions. Assuming the factor is chosen to be 2, the image will have to be partitioned into 2×2 blocks, and a one-pixel representation for each block will have to be found.

Blocks having less than two black pixels will be regarded as white. Their average representative value will be 0. Blocks having more than two black pixels will be considered as black, and their average representative value will be 1. The question is what would be the most appropriate decision for blocks having exactly two black pixels? One obvious approach would be to use some arbitrary decision mode. For example, "problematic" blocks will be assigned either always 0 or always 1. Unfortunately, if such an approach were to be adopted, it would either cause the disappearance of all narrow (one pixel wide) lines or would merge some originally disjoint lines. In any case, the deterioration in image quality would be unacceptable.

A preferred approach is based on the consideration of the vicinity of each "problematic" block. Under this scheme, a value 0 is assigned to each block having two black pixels, except for those cases where such an assignment would break a connection between two lines. In this last case, the assignment would be switched to 1. One possible embodiment of such an assignment scheme would be the following iterative procedure (still assuming that the factor of reduction is 2):

- a. The original binary image array O is partitioned into mutually exclusive 2×2 blocks.
- b. The final array O_r (i.e. the one with reduced resolution) is created by setting to 1 all pixels which correspond to the blocks of O and where the number of black pixels exceeds 2.
- c. Traverse the original array O on a block-by-block basis, for each block having exactly two black pixels. Denote by A through H all neighboring pixels (in array O_r) as depicted below, with the pixel under consideration being designated "X" (Array 4):

| | | |
|---|---|---|
| A | B | C |
| D | X | E |
| F | G | H |

d. If $B=D=E=G=1$, then X constitutes a narrow opening on the black background. Accordingly, X is set to 0, and the consideration is shifted to the next pixel of O (or to the corresponding Block of O).

e. If all of the pixels A through H in the vicinity of X are white (0), then we are dealing with a narrow black line. X is then set to 1, and the next pixel is taken into consideration.

f. If $D=E=0$, and in O there is a connection from B to G, then X is set to 1, and the next test below is performed.

The existence of the connection between B and G will be established by taking, from O, a 6×6 array T which consists of the pixels belonging to the block under consideration and its eight nearest neighbors, i.e. all the pixels belonging to the blocks in the scheme above. Per definition, the connection exists if each line of T has at least one black pixel.

g. If $B=G=0$, and in O there is a connection between D and E, then X is set to 1, and the scheme proceeds to the next test below.

The existence of the connection between D and E will be established by considering the array T which was defined in the previous stage. The connection exists if each column of T has at least one black pixel. h. At this stage of the process there remain only three possibilities: Between the pixels B, D, E, G there are one, two or three black pixels.

5 For each of these cases, the decision logic will be as follows:

1) Between B, D, E, and G there is exactly one black pixel.

This case is applicable mainly to the pixels located on the edges of relatively thick lines. Accordingly, an arbitrary decision mode may be adopted. However, in order to preserve the line width, X was chosen as $X = 1$ for lines coming from the top and left directions, and $X = 0$ for lines coming from the right and from the bottom. Accordingly,

a) If $B = 1$, and $D=E=G = 0$, then set X to 1

b) If $D = 1$, and $B=E=0$, then set X to 1.

c) Else, set X to 0 and proceed to the next pixel.

2) Between B, D, E and G there are exactly two black pixels.

a) If the black pixels are located opposite one another ($B=G=1$, or $D=E=1$), then set X to 1.

b) If the black pixels are adjacent to each other, i.e., if $B=D=1$, for example, the X should be set to 1 provided the number of black pixels in the original image within the block corresponding to B (or D) does not exceed 2.

c) Else, set X to 0.

3) Between B, D, E and G there are exactly three black pixels.

In this case, A should be set to 1 unless it is located in the vicinity of a curved line (say in the form of the character "c") so that improved image quality will be obtained by assigning $X=0$.

The decision regarding the curvature of the line in the vicinity of X can be reached with consideration being given to the 4×3 array T_1 defined as follows (Array 5):

25

| | | |
|---|---|---|
| A | B | C |
| F | G | H |
| A | D | F |
| C | E | H |

30

It is customary to say that the curvature is high (i.e. $X = 0$) if in each line of T_1 there is at least one black pixel.

4. Lossless Compression and Decompression of the Subsampled Image

The reduced original file O_r will be compressed and stored utilizing any of the conventional techniques for lossless compression of binary files, like MMR or Arithmetic Coder. Naturally, since the file O_r contains only a quarter of the number of pixels as compared to the original file O, it can be coded more efficiently. It has been found experimentally that the subsampled file O_r can be represented by a code two times shorter than that necessary for encoding the original file O.

5. Reconstruction of the Original Image and Postfiltering

The reconstruction of the original file will be performed by reversing the stages explained above. First, by lossless decompression, subsampled file O_r will be retrieved. Then an expanded version \tilde{O} will be obtained such that each pixel of O_r will be replaced by the 2×2 block of pixels having equal value.

Since the subsampling procedure of the invention is designed in a way to preserve the connectivity of the original file, the reconstructed file \tilde{O} will for practical purposes be as legible as the original O. However, since the subsampling causes a increase in effective pixel size, certain lines might have a somewhat "rugged appearance".

Consider, for example, the following short section of the subsampled image O_r (Array 6):

55

| | |
|---|---|
| . | 1 |
| 1 | . |

Such a configuration might have resulted from a diagonal line in the original image O, as depicted below (Array 7):

```

5      . . . . . 1 1
      . . . . . 1 1 1
      . . . . 1 1 1 .
      . . . 1 1 1 . .
10     . . 1 1 1 . . .
      . 1 1 1 . . . .
      1 1 1 . . . . .
      1 1 . . . . .

```

After subsampling and subsequent expansion of the image above, the array shown below will result (Array 8):

```

20     . . . . . 1 1
      . . . . . 1 1
      . . . . 1 1 . .
      . . . . 1 1 . .
25     . . 1 1 . . . .
      . . 1 1 . . . .
      1 1 . . . . . .
      1 1 . . . . . .

```

Clearly, the original line is smooth while the reconstructed line is flawed by a noticeable "staircase effect". One obvious approach to solve this problem would be to expand segments of the type (Array 9):

```

35     . 1
      1 .

```

into a filtered array like the one following (Array 10):

```

40     . . 1 1
      . 1 1 1
      1 1 1 .
45     1 1 . .

```

While this technique is adequate for the example shown above, it might cause quality deterioration in certain areas of the image, particularly at right-angle intersections of two lines, as shown in the next array (Array 11):

50

55

5
10

```

. . . . .
. . . . .
. . . . 1 1 1 1
. . . . 1 1 1 1
. . 1 1 . . . .
. . 1 1 . . . .
. . 1 1 . . . .
. . 1 1 . . . .

```

15 In this case, an indiscriminate transformation of the before-last Array 6 of O_i into Array 10 in \tilde{O} will distort sharp angles. Therefore, the simple solution outlined above will be unacceptable in practical applications. An alternative approach in accordance with the invention uses post-filtering of the expanded image \tilde{O} in order that diagonal lines (like the one of Array 7) will look smooth, and at the same time sharp angles will remain unaltered so as to maintain the subjective impression of a crisp image. This approach is computationally simple enough for the majority of the pixels so as to permit its execution on PC-based systems, with more sophisticated test being required only for relatively few "problematic" areas. The filtering logic proposed in this connection is the following:

20 a. Traverse the image O_n , making no changes unless a "problematic" area (Array 12) is located:

25

```

1 A      A 1
      or
B 1      1 B

```

wherein A or B, or both equal 0.

30 b. Consider the array shown below (Array 13). The discussion will be limited to a single array of this type although, in practice, one must consider all of the possible orientations this array can have.

35

```

A B C D
E F . 1
G H 1 I

```

40 1) If $C=1$ and $B=F=H=0$, then we are dealing with a small curve, and Array 13 should be transformed to the following Array 14:

45

```

A A . . 1 1 D D
A A . . 1 1 D D
E E . . . 1 1 1
E E . . . 1 1 1
G G . . 1 1 I I
G G . . 1 1 I I

```

50 2) If $C=D=E=F=0$, then we are dealing with a diagonal line and the array should be transformed to the following (Array 15):

55

5

 1 1
 . . . J H 1 1 1
 G G H H 1 1 I I
 G G H H 1 1 I I

10 wherein J = 1 if both G and H equal 1.

3) Else, we are dealing with the right angle between the two lines and no further action need to be taken, i.e. one proceeds to the next pixel.

Possible Substitution of the Five Stages of the Method

15 The description so far dealt with the preferred embodiments of the five stages of the inventive method. However, each stage may be modified in a certain way in order to better match the specific needs of any particular application. Some of these possible modifications will be described hereafter.

20 1. The prefiltering stage as described herein may be changed to another technique capable of reducing the scanning noise, like the one taught by T. Kimoto and R.G. Casey, "Edge Smoothing Algorithms for Horizontal and Vertical Line Patterns in Binary Images" IBM Research Report RJ 4156 (45944) November 1984, or F.M. Wahl, "A Binary Image Processor for Document Quality Improvement and Data Reduction", IBM Research Report RZ 1438 (52141) December 1985. In certain cases, e.g., where the noise is very low, or where there is little time and one is willing to trade performance quality for enhanced running time,

25 it might be advisable to discard this stage altogether.

2. Regarding the fast evaluation of the degree of compressibility, two alternative approaches have been described above: one pixel-based, the other byte-based. In both approaches, one can, of course, modify the various decision thresholds. Moreover, it is conceivable that in applications where the compressibility can be taken as granted, like compression of handwritten texts, this stage is entirely superfluous.

30 3. As far as the subsampling stage is concerned, it is important to perform this operation in order to guarantee that connectivity be preserved and that no disjoint features will be merged unintentionally. The discussion above of this step was based on the specific example of a subsampling factor of 2, both in x- and y-directions. While this subsampling factor is believed to be the most preferable, the factor may as well be chosen to be $\neq 2$. In cases where a very high compression ration is desired, the subsampling operation

35 may be performed in an iterative manner, with the effective subsampling factor being 2, 4, 8, etc.

4. To perform lossless compression, a variety of conventional coding schemes are available, such as Huffman, MMR or Arithmetic Codec.

40 5. An alternative to the postfiltering described above would be the use of the filter described in the Kimoto et al. reference mentioned before in connection with the prefiltering step. Again, in certain cases one might be willing to accept some degree of image quality degradation and, therefore, skip the postfiltering procedure.

45 The hardware implementation of the various operations involved in the inventive method does not require an inventive step: Those skilled in the art will immediately realize that there are various conventional ways to implement the design logic required. One preferred way is the use of look-up tables (LUT). For example, in the subsampling operation, there are three cases to be considered. The differentiation between them is based on the values of certain four pixels (here denoted by B, D, E and G). It will be easy for a skilled person to construct a LUT with 16 (2^4) rows and three columns, which would provide a fast way to determine which case is valid at any given time.

50 The inventive method is advantageous over the existing lossless compression techniques in the sense that it provides a considerable increase in compression ratio. An improvement by a factor of 2 is by no means exaggerated. Of course, this improvement is achieved at the expense of some deterioration of image quality. However, owing to the associative approach of the method of the invention, i.e., the compression scheme used on each particular image element being adapted to the characteristics thereof, the reconstructed binary texts are subjectively almost indistinguishable from the original from which they were derived.

55 As an example, consider the handwritten text of Fig. 4. Uncompressed, the text requires 80'080 bytes of storage space. After conventional lossless compression, the same text can be represented by only 2217 bytes. Fig. 4 shows the text so compressed. With the compression scheme of the inventive method, the same text can be compressed to mere 718 bytes. The image reconstructed from those 718 bytes is shown in Fig. 5. Al-

though a more than three-fold higher compression was performed as compared to the conventional lossless compression, the legibility of both, the conventionally compressed image of Fig. 4 and of the reconstructed image of Fig. 5 compressed in accordance with this invention, is virtually the same.

It is pointed out that owing to the specific nature of the inventive method, its implementation is very simple from a hardware point of view. Also, most present-day personal computers provide sufficient computing power to accommodate this method.

Claims

10

1. Method for high-quality compression of binary text images for storage and possible future processing including transmission over data links, involving the scanning thereof on the record carrier on which they are presented in a pixel-by-pixel raster scan and deriving a string of digital data from the scanner output, and partitioning said image into segments, characterized by the steps of determining the degree of compressibility of a segment by taking into consideration the number of uninterrupted runs of '1' or '0' within said segment and assigning according to said degree of compressibility one of at least two different compression ratios, one of which being lossy, to the data of said segment and compressing said data in accordance with said one compression ratio.
2. Method in accordance with claim 1, characterized in that the average length of said number of uninterrupted runs of "1" or "0" in one segment is determined to determine the degree of compressibility of said one segment.
3. Method in accordance with any of claim 1 or 2, characterized in that at the start of each segment, two registers for storing a first and a second number (m, n) are cleared, that all lengths (w) of uninterrupted runs of "0" or "1" are determined, that if a length (w) is larger than a predetermined length value (w_0), it is ignored. otherwise, the first number (n) is incremented by 1, and the second number (m) by w, and that at the end of the segment the feasibility of compression is determined by checking whether n is lower than a predetermined first threshold (n_0), or whether the ratio m/n exceeds a predetermined second threshold ($[m/n]_0$), in which cases lossy compression is performed while in all other cases lossless compression is performed.
4. Method in accordance with claim 3, characterized in that the said predetermined length value (w_0) is 12, that said first threshold (n_0) is 5, and that said second threshold ($[m/n]_0$) is 4.
5. Method in accordance with any of claim 1 or 2, characterized in that for each segment the number (m) of nonzero bytes containing at least one "1" respectively is counted and each such byte is translated into a binary number which - equals 1 if the byte under consideration contains a small black or white interval, that is, that byte does not equal either 00000000 or 11111111 and the first bit of the byte equals the last one, and which - equals 0 in all other cases, that the number (n) of pairs of consecutive "1"-s is counted, and that lossy compression is performed if n is smaller than a predetermined threshold and/or if n is smaller than a predetermined fraction of m.
6. Method in accordance with claim 5, characterized in that the threshold is 3, and that fraction equals 5 %.
7. Method in accordance with any the preceding claims, characterized in that said step of determining the degree of compressibility of the individual features of the original image is preceded by a prefiltering step involving the filtering of the scan data prior to compression through forced changing of all isolated "1" pixels as well as all horizontal and vertical sequences of "1" pixels to "0" if the said sequences are shorter than a predetermined length.
8. Method in accordance with claim 7, characterized in that the said predetermined length is set to three pixels.
9. Method in accordance with any of the preceding claims, characterized in that the segments are defined by partitioning the entire image area into mutually exclusive segments of uniform size.
10. Method in accordance with claim 9, characterized in that the mutually exclusive segments each correspond to a line or to two consecutive lines of scan of the original binary text image.

55

11. Method in accordance with any of the preceding claims, characterized in that the lossy compression involves steps of defining 2×2 blocks of pixels, and developing for each such block a i-bit representation by assigning a "0"-value to all blocks having less than two black pixels, and a "1"-value to all blocks having more than two black pixels, and by assigning a "0"-value to all blocks having exactly two black pixels, provided such an assignment does not break a connection between two lines and does not distort line curvature.

Patentansprüche

1. Verfahren zur qualitativ hochwertigen Komprimierung binärer Textbilder zur Speicherung und möglichen zukünftigen Verarbeitung einschließlich der Übertragung über Datenverbindungswege, bestehend aus der Abtastung der Datenträger, auf dem sie in einer Pixel-Pixel-Rasterabtastung dargestellt sind, und der Ableitung einer Kette digitaler Daten von der Scannerausgabe, charakterisiert durch die Schritte der Bestimmung des Grads der Komprimierbarkeit eines Segments durch Berücksichtigung der Anzahl ununterbrochener Aneinanderreihungen von '1' und '0' innerhalb des genannten Segments, der Zuordnung eines von mindestens zwei unterschiedlichen Komprimierungsverhältnissen entsprechend des genannten Grads der Komprimierbarkeit, wobei eines der Komprimierungsverfahren mit Verlusten von Daten des genannten Segments einhergeht, und der Komprimierung der genannten Daten in Übereinstimmung mit dem genannten einen Komprimierungsverhältnis.
2. Verfahren gemäß Anspruch 1, dadurch charakterisiert, daß die durchschnittliche Länge der genannten Anzahl ununterbrochener Aneinanderreihungen von '1' oder '0' innerhalb eines Segments bestimmt wird, um den Grad der Komprimierbarkeit des genannten einen Segments bestimmen zu können.
3. Verfahren gemäß einem der Ansprüche 1 oder 2, dadurch charakterisiert, daß zu Beginn jedes Segments zwei Register zur Speicherung einer ersten und einer zweiten Zahl (m, n) gelöscht werden, daß alle Längen (w) ununterbrochener Aneinanderreihungen von '0' oder '1' bestimmt werden, daß, wenn eine Länge (w) größer ist als ein vorbestimmter Längenwert (w_0), dieser ignoriert wird; ansonsten die erste Zahl (n) um 1, die zweite Zahl (m) um w inkrementiert wird, und daß am Ende des Segments die Durchführbarkeit der Komprimierung bestimmt wird, indem geprüft wird, ob n geringer ist als ein vorbestimmter erster Schwellenwert (n_0) oder ob das Verhältnis m/n einen vorbestimmten zweiten Schwellenwert ($(m/n)_0$) überschreitet; in diesen Fällen wird eine Verlustkomprimierung durchgeführt, während in allen anderen Fällen eine verlustfreie Komprimierung durchgeführt wird.
4. Verfahren gemäß Anspruch 3, dadurch charakterisiert, daß der genannte vorbestimmte Längenwert (w_0) 12 ist, daß der genannte erste Schwellenwert (n_0) 5 ist, und daß der genannte zweite Schwellenwert ($(m/n)_0$) 4 ist.
5. Verfahren gemäß einem der Ansprüche 1 oder 2, dadurch charakterisiert, daß für jedes Segment die Anzahl (m) an Nicht-Null-Bytes, die mindestens je eine "1" enthalten, gezählt wird und jedes dieser Bytes in eine Binärzahl umgewandelt wird, die - gleich 1 ist, wenn das in Betracht befindliche Byte ein kleines schwarzes oder weißes Intervall enthält, das heißt, dieses Byte ist nicht gleich 00000000 oder 11111111 und das erste Bit des Bytes stimmt mit dem letzten überein, und die - in allen anderen Fällen gleich Null ist, das heißt, daß die Anzahl (n) der Paare aufeinanderfolgender "1" gezählt wird, und daß eine Verlustkomprimierung durchgeführt wird, wenn n kleiner ist als ein vorbestimmter Schwellenwert und/oder wenn n kleiner ist als ein vorbestimmter Anteil von m.
6. Verfahren gemäß Anspruch 5, dadurch charakterisiert, daß der Schwellenwert 3 ist und daß der Anteil 5% beträgt.
7. Verfahren gemäß jedem der vorherigen Ansprüche, dadurch charakterisiert, daß vor dem genannten Schritt zur Bestimmung des Grads der Komprimierbarkeit der einzelnen Eigenschaften des ursprünglichen Bildes ein Vorfilterungsschritt stattfindet, der vor der Komprimierung die Filterung der Abtastdaten einbezieht, bevor die Komprimierung durch erzwungene Änderung aller isolierten "1"-Pixel auf "0" stattfindet, wenn die genannten Sequenzen kürzer sind als eine vorbestimmte Länge.
8. Verfahren gemäß Anspruch 7, dadurch charakterisiert, daß die genannte vorbestimmte Länge auf drei Pixel gesetzt wird.

9. Verfahren gemäß jedem der vorherigen Ansprüche, dadurch charakterisiert, daß die Segmente durch Partitionierung des gesamten Bildbereichs in gegenseitig ausschließliche Segmente einheitlicher Größe definiert werden.
- 5 10. Verfahren gemäß Anspruch 9, dadurch charakterisiert, daß die gegenseitig ausschließlichen Segmente je einer Zeile oder zwei aufeinanderfolgenden Zeilen der Abtastung des ursprünglich binären Textbildes entsprechen.
- 10 11. Verfahren gemäß jedem der vorherigen Ansprüche, dadurch charakterisiert, daß die Verlustkomprimierung zwei Schritte zur Definition von 2×2 Pixelblöcken umfaßt, und daß durch Zuordnung eines "0"-Werts an alle Blöcke mit weniger als zwei schwarzen Pixeln für jeden genannten Block eine 1-Bit-Darstellung entwickelt wird, und durch Zuordnung eines "1"-Werts an alle Blöcke mit mehr als zwei schwarzen Pixeln, und durch Zuordnung eines "0"-Werts an alle Blöcke mit genau zwei schwarzen Pixeln, vorausgesetzt, daß eine solche Zuordnung nicht die Verbindung zwischen zwei Linien aufbricht und nicht die Krümmung einer Linienkurve ablenkt.
- 15

Revendications

- 20 1. Procédé destiné à la compression de haute qualité d'images de texte binaires pour un stockage et un traitement futur possible y compris la transmission sur des liaisons de données, impliquant le balayage de celles-ci sur le support d'enregistrement sur lequel elles sont présentées suivant un balayage de trame pixel par pixel et en obtenant une chaîne de données numériques à partir de la sortie du dispositif de balayage, et en partageant ladite image en segments, caractérisé par les étapes consistant à déterminer le
- 25 degré de compressibilité d'un segment en prenant en considération le nombre de suites ininterrompues de "1" ou de "0" à l'intérieur dudit segment et en affectant conformément audit degré de compressibilité l'un parmi au moins deux taux de compression différents, l'un de ceux-ci entraînant des pertes, aux données dudit segment et en compressant lesdites données conformément avec ledit un taux de compression.
- 30 2. Procédé selon la revendication 1, caractérisé en ce que la longueur moyenne dudit nombre de suites ininterrompues de "1" ou de "0" dans un segment et déterminé de façon à déterminer le degré de compressibilité dudit un segment.
- 35 3. Procédé selon l'une quelconque des revendications 1 ou 2, caractérisé en ce que au début de chaque segment, deux registres destinés à mémoriser un premier et un second nombre (m , n) sont effacés, en ce que toutes les longueurs (w) de suites ininterrompues de "0" ou de "1" sont déterminées, en ce qu'une longueur (w) est plus grande qu'une valeur de longueur prédéterminée (w_0), celle-ci est écartée sinon, le premier nombre (n) est incrémenté de 1 et le second nombre (m) de w , et en ce qu'à la fin du segment la faisabilité de la compression est déterminée en vérifiant si n est inférieur à un premier seuil (n_0) prédéterminé, ou si le rapport m/n dépasse un second seuil prédéterminé ($(m/n)_0$), auxquels cas une compression à pertes est effectuée alors que dans tous les autres cas une compression sans pertes est effectuée.
- 40 4. Procédé selon la revendication 3, caractérisé en ce que ladite valeur de longueur prédéterminée (w_0) est 12, en ce que ledit premier seuil (n_0) est 5, et en ce que ledit second seuil ($(m/n)_0$) est 4.
- 45 5. Procédé selon l'une quelconque des revendications 1 ou 2, caractérisé en ce que pour chaque segment le nombre (m) d'octets non nuls, contenant au moins un "1" respectivement, est compté et que chaque tel octet est transposé en un nombre binaire qui - est égal à 1 si l'octet que nous considérons contient un petit intervalle noir ou blanc, c'est-à-dire que cet octet n'est pas égal à soit 00000000 ou 11111111 et que
- 50 le premier bit de l'octet est égal au dernier, et qui - est égal à 0 dans tous les autres cas, en ce que le nombre (n) de paires de "1" consécutifs est compté, et en ce qu'une compression à pertes est effectuée si n est plus petit qu'un seuil prédéterminé et/ou si n est plus petit qu'une fraction prédéterminée de m .
- 55 6. Procédé conforme à la revendication 5, caractérisé en ce que le seuil est 3 et en ce que la fraction est égale à 5 %.
7. Procédé selon l'une quelconque des revendications précédentes, caractérisé en ce que ladite étape de détermination des degrés de compressibilité des particularités individuelles de l'image originale est pré-

cedée d'une étape de pré-filtrage appliquant le filtrage des données balayées avant la compression au moyen d'une modification forcée de tous les pixels "1" isolés, de même que toutes les séquences horizontales et verticales de pixels "1" à "0" si lesdites séquences sont plus courtes qu'une longueur prédéterminée.

5

8. Procédé selon la revendication 7, caractérisé en ce que ladite longueur prédéterminée est établie à trois pixels.

10

9. Procédé selon l'une quelconque des revendications précédentes caractérisé en ce les segments sont définis en partageant la zone d'image entière en segments mutuellement exclusifs de taille uniforme.

10. Procédé selon la revendication 9, caractérisé en ce que les segments mutuellement exclusifs correspondent chacun à une ligne ou à deux lignes consécutives de balayage de l'image de texte binaire original.

15

11. Procédé selon l'une quelconque des revendications précédentes, caractérisé en ce que la compression à pertes implique les étapes consistant à définir des blocs 2 x 2 de pixels et à développer pour chaque tel bloc une représentation à 1 bit en appliquant une valeur "0" à tous les blocs présentant moins de deux pixels noirs, et une valeur "1" à tous les blocs présentant plus de deux pixels noirs, et en affectant une valeur "0" à tous les blocs présentant exactement deux pixels noirs, à condition qu'une telle affectation ne coupe pas une liaison entre deux lignes et ne déforme une courbure de ligne.

20

25

30

35

40

45

50

55


FIG. 1

[illegible]

FIG. 2

[illegible]

FIG. 3

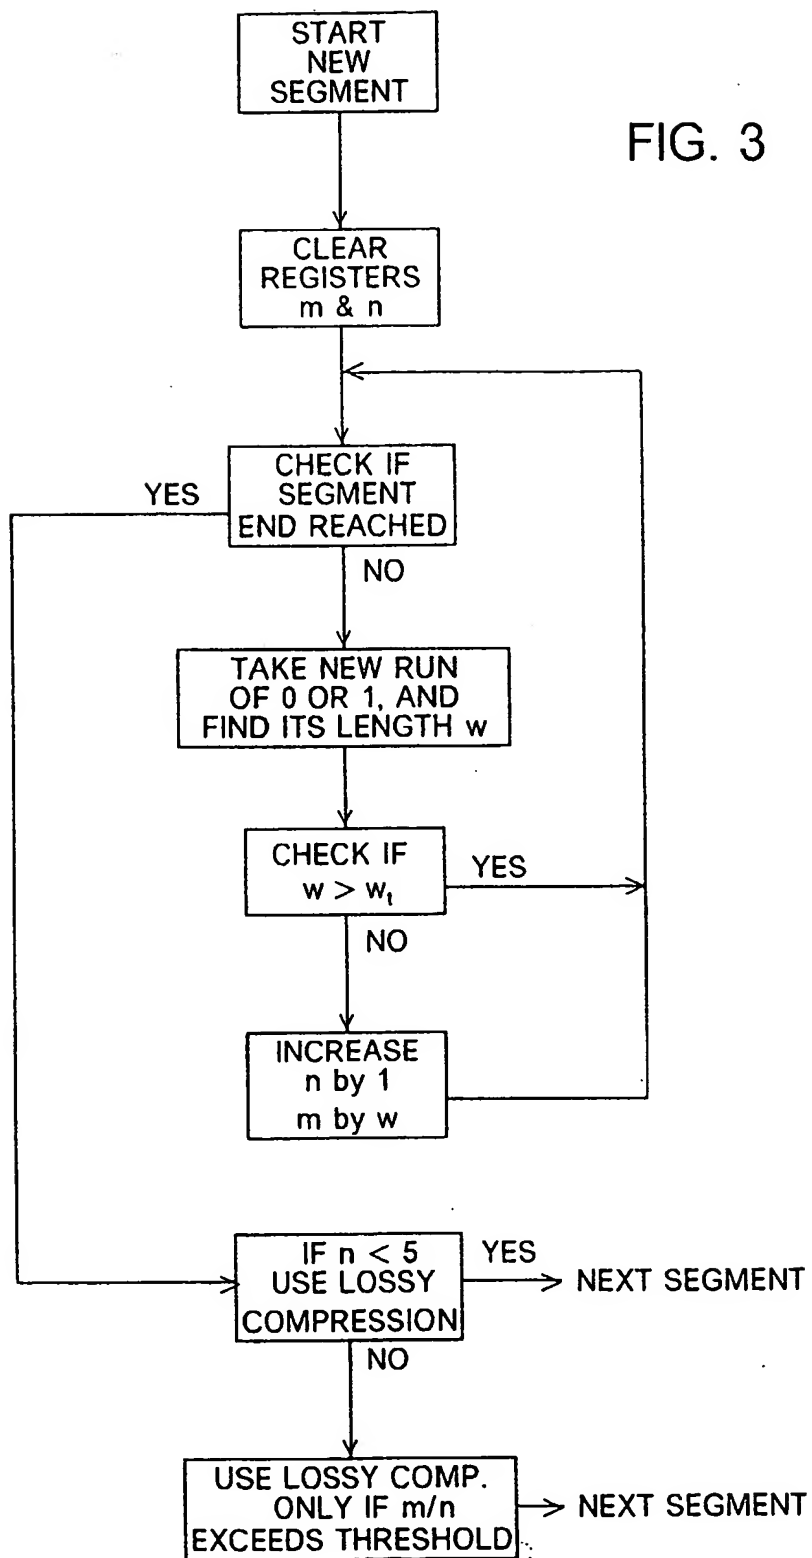

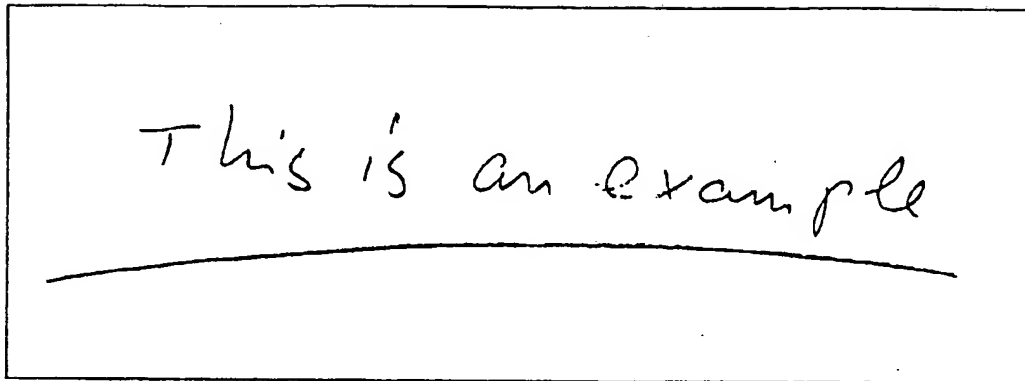


FIG. 4

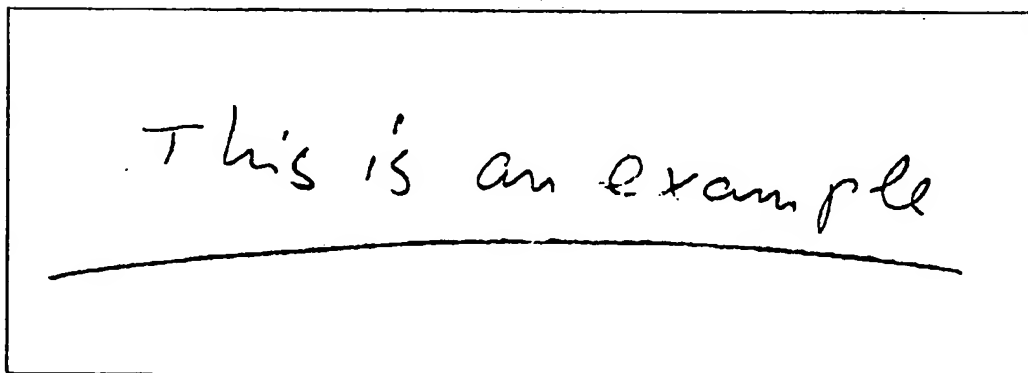


FIG. 5